


ELECTRICAL SPECIFICATIONS

FREQUENCY: DC - 6.000 GHz
 IMPEDANCE (NOM): 50 OHMS
 VSWR (MAX):
 DC - 2.000 GHz: 1.10 : 1
 2.000 - 4.000 GHz: 1.20 : 1
 4.000 - 6.000 GHz: 1.30 : 1
 POWER (AVG): 35 WATTS
 (PEAK): 5 kWATTS

MECHANICAL SPECIFICATIONS

CONNECTOR: N-FEMALE, BRASS, NICKEL PLATE
 N-FEMALE PIN: BERYLLIUM COPPER, SILVER PLATE
 BODY, HEAT SINK: ALUMINUM, BLACK ANODIZE
 INSULATOR: PTFE, VIRGIN ELECTRICAL GRADE
 WEIGHT: 135 GRAMS

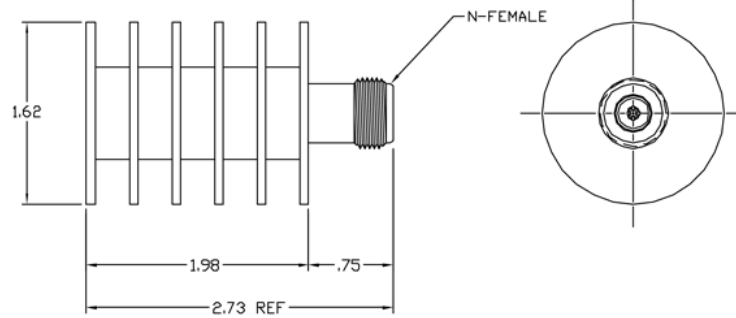

This document gives only a description of the product(s)
 and shall not form part of any contract.
 Please contact a MECA Applications Engineer for the
 most current specification drawing.

UNLESS OTHERWISE
 SPECIFIED, DIMENSIONS
 ARE IN INCHES

TOLERANCES
 2 PLACES: ± .02
 3 PLACES: ± ----
 ANGLES: ± ----

TIR:

SCALE: NTS

SHEET:



ELECTRONICS, INC.
 DENVER, NEW JERSEY
 e-meca.com

TITLE
 TERMINATION, 50 OHMS,
 35 WATTS, TYPE N-FEMALE

CODE IDENT. NO.

22424

DRAWING NO.

404-2