

MW-V24S10W-CPR90G

2.4m 10GHz High Performance Microwave Antenna

PROSE

- High Performance Antenna
- 10.00-11.70 GHz
- Single-Polarized



Electrical Data

Operating Frequency		10.00-11.70 GHz
Gain*	Low	45.4 dBi
	Mid	46.2 dBi
	High	46.8 dBi
3dB BW (Azimuth & Elevation)		0.8 deg
Regulatory Compliance		ETSI 302 217 R1 Class3 US FCC Part 101A @ 10.55-10.7GHz US FCC Part 101A @ 10.7-11.7GHz Canada SRSP310.7 Part A
RPE Number		RPE24-10W
VSWR (Return Loss)		1.30 (-17.7 dB)
F/B Ratio		72 dB
XPD		30 dB
Polarization		Single-polarized
Interface Waveguide Type		CPR90G

* Tolerance : ± 1.0 dBi.

Environmental Data

Operating Temperature		-45°C to +65°C
Wind resistance	Operational	108 km/h 67 mph
	Survival	198 km/h 123 mph

Mechanical Data


Reflector Construction		One-piece reflector
Adjustment	Azimuth	$\pm 5^\circ$
	Elevation	$\pm 5^\circ$
Packed Dimension	L / W / H	2700mm / 1150mm / 2560mm 106.30in / 45.28in / 100.79in
Packing		Angle steel
New Weight		175kg 385.8 lb
Gross Weight		275kg 606.3 lb

MW-V24S10W-CPR90G

2.4m 10GHz High Performance Microwave Antenna

PROSE

Antenna Dimension (in mm) and Mounting Kit

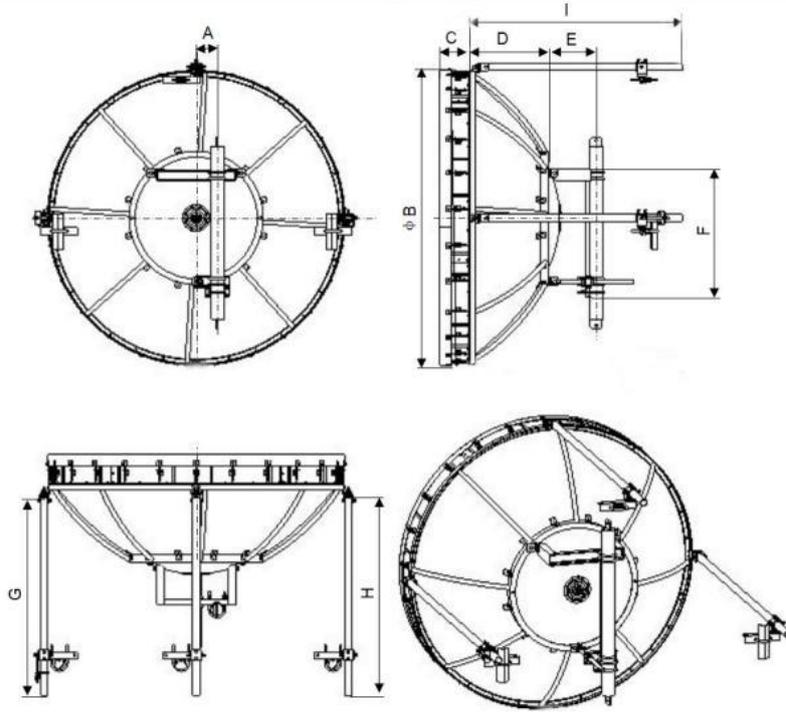

Pole diameter 120 mm | 5 in
Side struts, included 3

Dimension (mm)	A	B	C	D	E	F	G	H	I
	180	2580	250	680	405	1105	2000	2500	2000

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.