

VP-TR-6

HyperConnect Multi-Connectivity Box




SPECIFICATIONS

Max Fiber Count	holds up to 1728 fibers
Enclosure Dimensions	12U (24.5" H x 20.3" W x 15.0" D)
Weight	45lbs
Material / Color	aluminum & rugged PC-ABS / white
Fiber Entry Points	8x rectangular brush entries 28x circular grommet entries
Splicing Capabilities	holds up to 12 Mass Fusion Splice (MFS) trays (2 / drawer)
Additional Features	custom shelf configurations for splicing, presentation, or storage

Telecom Room Box Design Highlights

- A** Tool-free latching door
- B** Removable slack management cover
- C** Slide-out presentation panel, with slack management spool, that fits standard LGX panels
- D** Slide-out splice tray drawers (VP-SPLT-12 sold separately)
- E** Fiber routing guide with snap-in retention clips

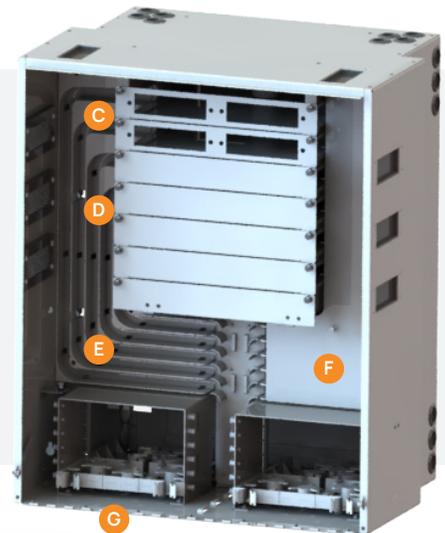

- F** Removable panel cover for fiber routing guide
- G** Slide-in/ out slack management tray (holds up to 12 trays) with numerous possible routing schemes
- H** Removable back access panel for easy access to slack management trays
- I** Mounting flanges for wall or rack mounting