



Y(B)8066

Directional Yagi Antenna 806-896 MHz

TE Connectivity premium series directional Yagi antennas are fully gold anodized for corrosion resistance. All UHF and above frequency antennas feature internal matching to assure broad bandwidth and resistance to severe weather conditions. There is no gamma match to ice up, corrode or detune. Our engineering staff has optimized the product family for forward gain by computer analysis and then field-tested each for conformance.

FEATURES AND BENEFITS

- All UHF and higher frequency antennas feature 360° welds around each element and an end-of-boom N connector feed with an internal transmission line feeding the driven element.
- Each Yagi is tuned on a network analyzer for best power match and lowest VSWR.
- All Yagi antennas ship complete with a high-quality cast aluminum mounting kit that includes stainless-steel hardware and allows vertical or horizontal orientation during installation (VHF models require light assembly)

APPLICATIONS

- Point-to-point and multi-point/omnidirectional outdoor antennas applications used by private organizations and government agencies around the globe
- Typical applications include transportation such as railroad switching, remote locations reporting examples that include oil fields, weather conditions and, meter data transmissions for utilities

ELECTRICAL SPECIFICATION

Model Name	Y(B)8066
Operating Frequency (MHz)	806-896
Frequency Bandwidth (MHz)	90
VSWR	<2.0:1
Return Loss (dB)	-10 max
Gain (dBd)	9.0
Nominal Impedance (Ohms)	50
Max Power - Ambient 25°C (W)	300
Polarization	Vertical or horizontal
Pattern	Directional
Vertical Plane 3 dB Beamwidth	52°
Horizontal Plane 3 dB Beamwidth	56°
Tuning	Fixed
Transmitting/Receiving	Both
Front-to-Back Ratio (dB)	20


MECHANICAL SPECIFICATION

Dimensions - L x H - cm (inches)	70.33 x 18.41 (27.69 x 7.25)
Weight - kg (lbs.)	1.77 (3.9)
Boom Diameter - cm (inches)	2.22 (0.875)
Cable Type	None
Material	Aluminum
Equivalent Flat Area - sq. ft.	0.2505
Termination	N-female connector
Color	Gold or black anodized
Lightning Protection	Lightning Arrestor LABH350NN (Sold Separately)


ENVIRONMENTAL SPECIFICATION

Rated Wind Velocity - km/hr (mph)	241 (150)
Rated Wind Velocity w/ 0.5: radial ice - km/hr (mph)	130 (80)


MECHANICAL DRAWING

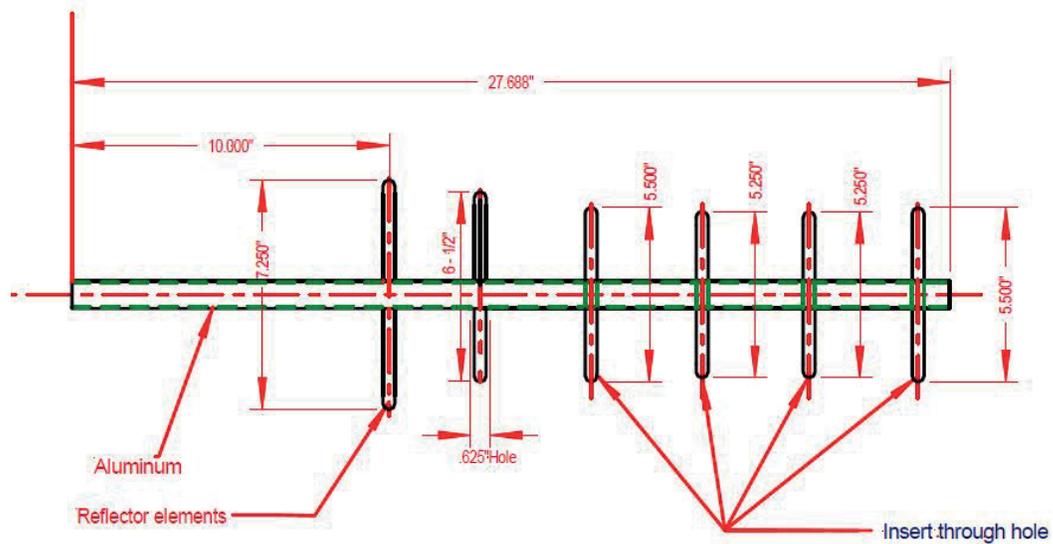

RADIATION PATTERNS

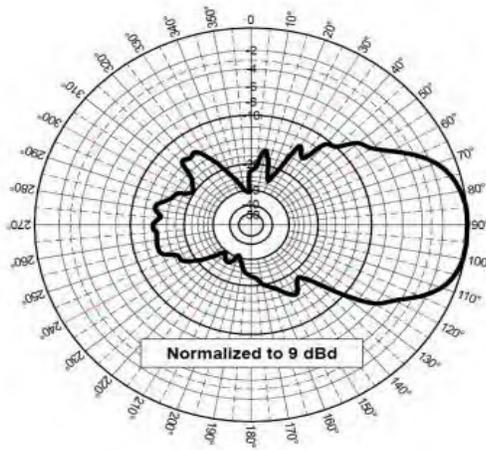


**Vertical-to-Vertical Polarization
Azimuthal Pattern (X, Y or E-Plane)**

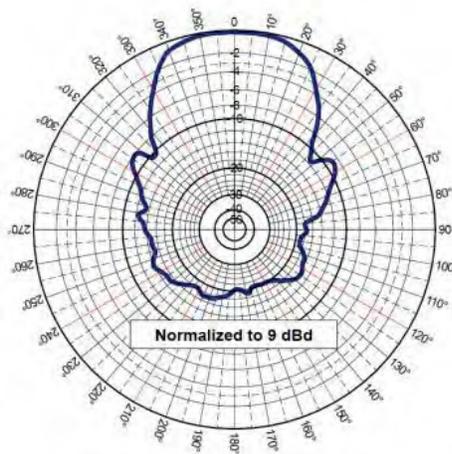

**Horizontal-to-Horizontal Polarization
Elevation Pattern (Y, Z or H-Plane)**

VSWR

VSWR of Y(B)8066

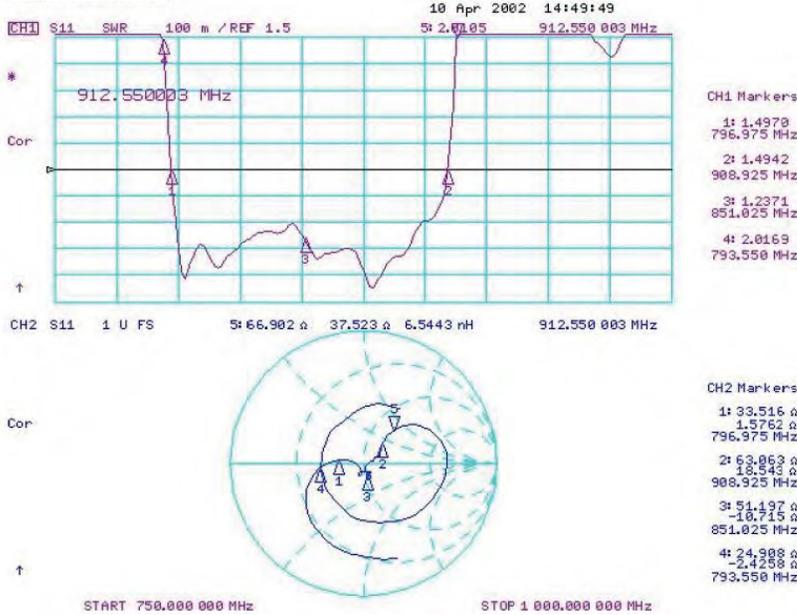

Y8066 Typical VSWR sweeps – Primary Specifications

Marker 1: 1.4970 to 1 @ 796.975 MHz
 Marker 2: 1.4942 to 1 @ 908.925 MHz
 Marker 3: 1.2371 to 1 @ 851.025 MHz

Y8066 Typical VSWR sweeps – Secondary Specifications

Marker 4: 2.0 to 1 @ 793.550 MHz
 Marker 5: 2.0 to 1 @ 912.550 MHz
 4/10/2002

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original