

DIRECTIONAL YAGI ANTENNAS

Y(B)8966

GOLD SERIES DIRECTIONAL YAGI ANTENNAS PROVIDE INDUSTRY-LEADING DESIGN FEATURES WITH LONG TERM OPTIMAL PERFORMANCE

Y(B)8966 premium series directional Yagi antennas are fully gold anodized for corrosion resistance. All UHF and above frequency antennas feature internal matching to assure broad bandwidth and resistance to severe weather conditions. There is no gamma match to ice up, corrode or detune. Our engineering staff has optimized the product family for forward gain by computer analysis and then field-tested each for conformance.

FEATURES AND BENEFITS

- All UHF and higher frequency antennas feature 360° welds around each element and an end-of-boom N connector feed with an internal transmission line feeding the driven element.
- Every Yagi is tuned on a network analyzer for best power match and lowest VSWR.
- All Yagi antennas ship complete with a high quality cast aluminum mounting kit that includes stainless steel hardware and allows vertical or horizontal orientation during installation (VHF models require light assembly).

APPLICATIONS

- Point-to-point and multi-point / omnidirectional outdoor antennas applications used by private organizations and government agencies around the globe.
- Typical applications include transportation such as railroad switching, remote locations reporting examples that include oil fields, weather conditions and, meter data transmissions for utilities.

ELECTRICAL

| | |
|--|------------------------|
| Frequency Range | 896 - 970 MHz |
| Frequency Bandwidth | 74 MHz |
| VSWR | < 2:1 |
| Return Loss | -10 dB max |
| Nominal Gain | 9 dBd |
| Front to Back Ratio | 20 dBd |
| Maximum Power | 300 W |
| Nominal Impedance | 50 Ω |
| Polarization | Vertical or Horizontal |
| Pattern | Directional |
| Horizontal Beamwidth (For Horizontal Polarization) | 56° |
| Vertical Beamwidth (For Vertical Polarization) | 52° |
| Tuning | Fixed |
| Transmitting/Receiving | Both |


MECHANICAL

| | |
|--|---|
| Material | Aluminum |
| Length | 27.688" |
| Height | 6.75" |
| Boom Diameter | 0.875 |
| Weight | 3.9 lbs |
| Rated Wind Velocity | 150 mph (241 kph) |
| Rated Wind Velocity (with 0.5" radial ice) | 80 mph (130 kph) |
| Equivalent Flat Area | 0.2492 sq. ft. |
| Cable | None |
| Termination | N-female connector |
| Color | Gold or Black Anodized |
| Lightning Protection | Lightning Arrester LABH350NN (Sold Separately) |
| Mounting Included | Heavy duty cast aluminum bracket accommodates up to 2-1/2" mast |


CONFIGURATION

| | |
|----------|----------------|
| Y8966 | Gold Anodized |
| YB8966-L | Black Anodized |

ANTENNA RADIATION PATTERN

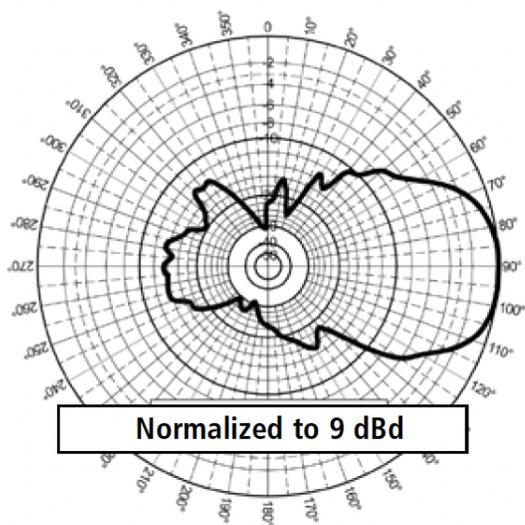

**Vertical-to-Vertical Polarization
Azimuthal Pattern (Y, Z, or E-plane)**

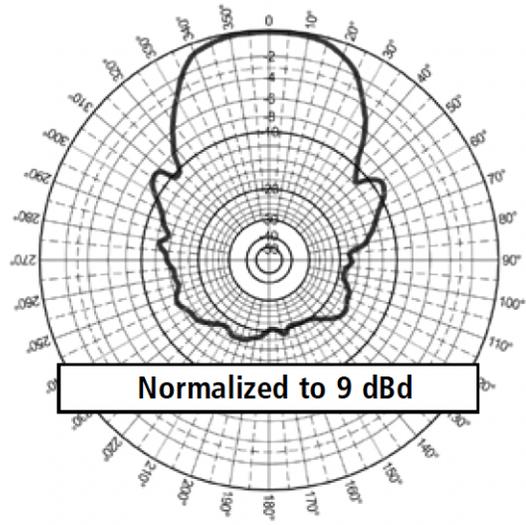

**Horizontal-to-Horizontal Polarization
Azimuthal Pattern (Y, Z, or H-plane)**

TE TECHNICAL SUPPORT CENTER

| | |
|-------------------|-----------------------|
| USA: | +1 (800) 522-6752 |
| Canada: | +1 (905) 475-6222 |
| Mexico: | +52 (0) 55-1106-0800 |
| Latin/S. America: | +54 (0) 11-4733-2200 |
| Germany: | +49 (0) 6251-133-1999 |
| UK: | +44 (0) 800-267666 |
| France: | +33 (0) 1-3420-8686 |
| Netherlands: | +31 (0) 73-6246-999 |
| China: | +86 (0) 400-820-6015 |

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original