



## B1360W

### Wide Band Mobile Load Coil Antenna 136-174 MHz

TE Connectivity's ongoing commitment to refinement in mechanical and electrical design has resulted in the most technically advanced mobile load coil antennas on the market. Exclusive features such as stainless-steel whips, housings constructed with ABS material injected molded around a solid brass insert, and gold-plated push pin contacts make TE Connectivity the obvious choice for quality and long-lasting value for demanding mobile radio communications.

#### FEATURES AND BENEFITS

- High performance wide band mobile antenna
- Special UV-treated radome, resists sun damage
- Easy installation with optional NMO mounts
- 100% tested on a network analyzer

#### APPLICATIONS

- Public safety
- Transportation
- Utility
- Military mobile

#### ELECTRICAL SPECIFICATION

Model Name	B1360W
Operating Frequency (MHz)	136-174
Number of Ports	1 (VHF)
Center Frequency (MHz)	155
Gain	Unity
Pattern	Omnidirectional
VSWR	≤ 2.0:1
Nominal Impedance (Ohms)	50
Max Power - Ambient 25°C (W)	100
Polarization	Vertical

## MECHANICAL SPECIFICATIONS

Length - cm (inches)	-49.4 (-19.5)
Diameter - mm (inches)	36.58 (1.44)
Weight - kg (oz.)	0.268 (9.44)
Termination	1-1/8" - 18 thread (NMO) mounts
Mounting Options (sold separately)	3/4" or 3/8" NMO magnetic or trunk mount
Radiator	17-7ph straight stainless steel
Shock Spring	302 stainless steel
Base Housing Material	Molded ABS
Noise Suppressor (sold separately)	Blackhawk NS1535

## ENVIRONMENTAL SPECIFICATIONS

Operating Environment (Indoor or Outdoor)	Outdoor
Wind Resistance - sq. ft.	0.049
Material Substance Compliance	RoHS


## CONFIGURATION

PART NUMBER	DESCRIPTION
B1360W	Chrome B-coil wide band antenna
BB1360W	Black B-coil wide band antenna
B1360WS	Chrome B-coil wide band antenna w/ spring
BB1360WS	Black B-coil wide band antenna w/ spring


## RADIATION PATTERNS

154 MHz

Azimuth Plot

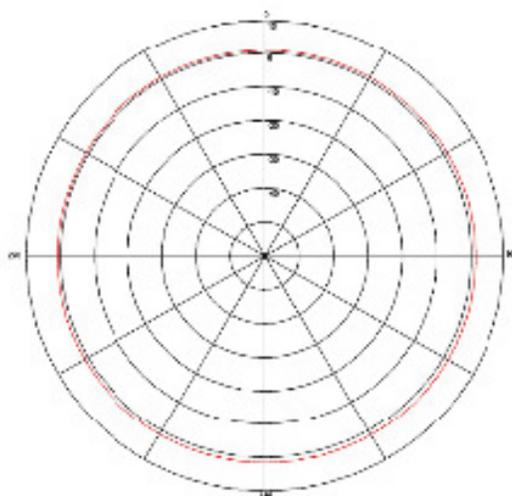

Elevation Plot

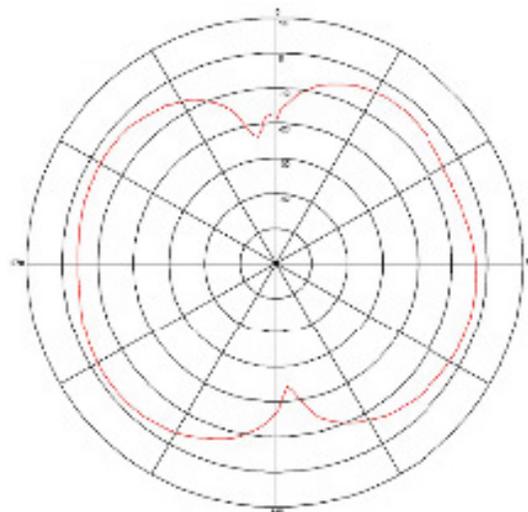

## VSWR PLOT AT 136-174 MHZ



### TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

### te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original