## **Power Splitters, Dx-85FE series**



2, 3, 4 & 6 way Block & Tube Style, Reactive Dividers Super wideband, 694 - 2,700 MHz, 4.3-10 Rev. C

- Multiple-Band Frequencies
- 500 Watt Continuous Average Power
- Minimal RF Insertion Loss
- High Reliability, IP67
- Low Specified PIM
- RoHS compliant
- Low Cost Design



### Four Way Splitter D4-85FE


Microlab Model Dx-85FE series of 2, 3, 4 and 6 way Power Splitters have been designed to evenly split high power cellular signals with minimal reflections or loss. All joints are moisture sealed to meet the IP67 rating. The design allows simple attachment to wall using the supplied bracket and clip.

The wide frequency range allows use with multiband antennas and leaky cable systems. With few solder joints and an air dielectric, the loss has been minimized and reliability enhanced. Units also available with N and 7-16 connectors.

Impedance:	$50\Omega$ nominal					
Power Rating:	500W avg, 3kW pk.					
PIM, Passive IM:	-161 dBc					
	(2 tones at +43 dBm)					
Environment:	IP67, -35°C to +75°C					
	RoHS compliant					
Finish: Connectors:	4.3-10 (f), Triplate					
Housing:	Passivated aluminum					
Mounting:	Bracket & clip supplied					

Model Number	No. of Ways	Frequency Band, MHz	Split Loss	•	Amplitude Balance, typ.	Input VSWR	Power Rating Avg Peak		Weight, nom. Ibs. (kg)	
		24114,1112	2055	2000/ ()p:	Dalalice, cypi			. cun		(18)
D2-85FE	2	694 - 2700	3 dB	0.10 dB	0.15dB	<1.15:1	500W	3 kW	0.60	(0.28)
D3-85FE	3	694 - 2700	4.8 dB	0.10 dB	0.25dB	<1.15:1	500W	3 kW	0.65	(0.30)
D4-85FE	4	694 - 2700	6 dB	0.10 dB	0.25dB	<1.25:1	500W	3 kW	0.70	(0.32)
D6-85FE	6	694 - 2700	7.8 dB	0.10 dB	0.25dB	<1.30:1	500W	3 kW	0.80	(0.36)

### 2, 3 & 4 way Outlines

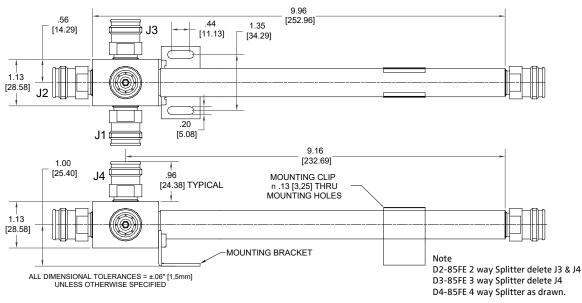

#### Note: Specifications are subject to change without prior notification.

Microlab, A Wireless Telecom Group Company, 25 Eastmans Road, Parsippany, NJ 07054 Tel: (973) 386-9696 • sales@microlabtech.com • www.microlabtech.com • Fax: (973) 386-9191



# **Power Splitters, Dx-85FE series**

page 2

