



WPD136M6C-001

Multi-Band Mobile Antenna 136-174 MHz/380-520 MHz/760-870 MHz

TE Connectivity's patent-pending WPD136M6C-001 multi-band mobile antenna is a commercial, heavy-duty vehicular antenna. It has an omnidirectional pattern and is vertically polarized with a 50Ω match. It also has excellent quality and RF performance and is specifically designed as a full spectrum public safety voice and data communications antenna.

FEATURES AND BENEFITS

- High-performance, broad-banded, multi-band coverage
- Heavy-duty design
- Injection molded housing and base
- No base radiators (all enclosed coils)
- Solid brass chrome-plated ferrules with dual set screw lock

APPLICATIONS

- General analog and digital voice/data communications
- VHF (high), UHF, 700/800
- Tetra PMR and P25 public safety
- Transportation, utilities, government, military, PAMR, commercial and industry, oil and gas

ELECTRICAL SPECIFICATION

Model Name	WPD136M6C-001		
Operating Frequency (MHz)	136-174	380-520	760-870
VSWR - Max	≤ 2.5:1		
Gain (dBi)	Unity		
Peak Gain (dBi) - Azimuth Cut (Phi = 0°)	-0.7	-3.7	3.1
Peak Gain (dBi) - Elevation Cut (Phi = 0°)	0.2	4.8	8.1
Nominal Impedance (Ohms)	50		
Max Power - Ambient 25°C (W)	100		
Polarization	Vertical		
Pattern	Omnidirectional		
Vertical Plane 3 dB Beamwidth	90°	40°	60°
Horizontal Plane 3 dB Beamwidth Port 1	360°	360°	360°

MECHANICAL SPECIFICATION	
Dimensions - round base x height - cm (inches)	6.35 x 50.8 (2.5 x 20.0)
Connector	NMO
Radome Material	High impact PC/ABS

ENVIRONMENTAL SPECIFICATION	
Ingress Protection Rating	IP66
Material Substance Compliance	RoHS

VHF BAND (136-174 MHz)

PEAK GAIN (dBI)	AZIMUTH PATTERN	ELEVATION PATTERN
136 MHz	-2.4	0.2
146 MHz	-2.7	-1.8
156 MHz	-0.7	-3.1
174 MHz	-3.5	-4.1

UHF BAND (380-520 MHz)


PEAK GAIN (dBI)	AZIMUTH PATTERN	ELEVATION PATTERN
380 MHz	-11.3	6.1
400 MHz	-7.0	7.7
440 MHz	-4.1	4.8
460 MHz	-3.7	3.0
500 MHz	-5.5	3.3
520 MHz	-6.6	3.5

UHF BAND (760-870 MHz)


PEAK GAIN (dBI)	AZIMUTH PATTERN	ELEVATION PATTERN
760 MHz	3.1	3.1
815 MHz	-0.2	7.9
870 MHz	-8.8	8.1

RADIATION PATTERNS

156 MHz

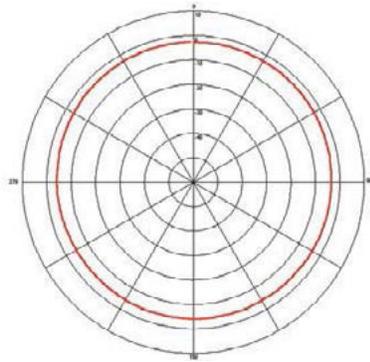


Azimuth Cut, $\Phi=0^\circ$

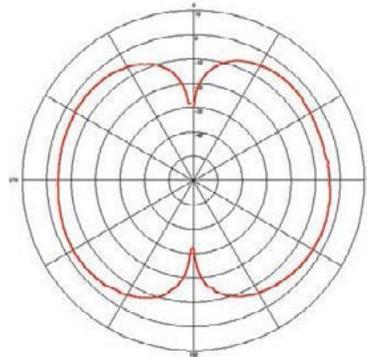


Elevation Cut, $\Phi=90^\circ$

440 MHz

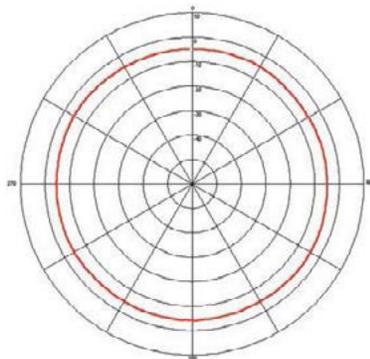


Azimuth Cut, $\Phi=0^\circ$

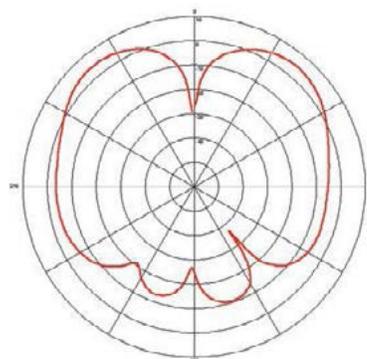


Elevation Cut, $\Phi=90^\circ$

815 MHz

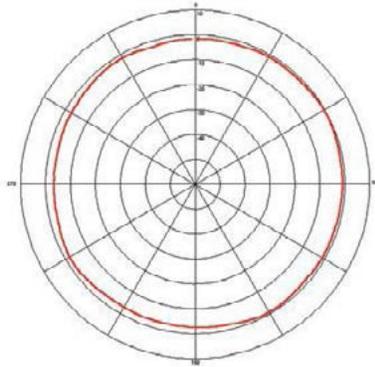

Azimuth Cut, $\Phi=0^\circ$

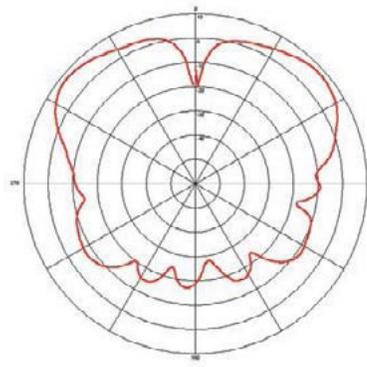

Elevation Cut, $\Phi=90^\circ$

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original