



## DIRECTIONAL FLAT PANEL ANTENNA

### PA9-12

#### 900 MHZ 12 DBI FLAT PANEL ANTENNA

The PA9-12 flat panel directional antenna offers high-gain in a thin, low-profile package. The antenna is constructed of an off white color UV resistant ASA plastic radome with an aluminum backplate. The antenna can be used in horizontal or vertical polarization. The heavy duty pole mount bracket allows up or down tilt adjustment and the stainless steel hardware assures a long service life. The antenna can be surface mounted or pole mounted. The PA9-12 comes with an integral N female connector standard.

#### FEATURES


- High gain / low profile
- Pole mount or surface mount
- Rugged IP67 rated weatherproof construction
- Vertical or horizontal polarization

#### MARKETS

- 900 MHz wireless LAN applications
- WISP client antennas
- RFID applications
- OEM wireless data
- Transport terminals
- WiMAX

PARAMETER	SPECIFICATION
Part Number	PA9-12
Frequency	902-928 MHz
Gain	12 dBi
3 dB Beamwidth-Azimuth	40°
3 dB Beamwidth-Elevation	55°
Polarization	Linear Vertical
VSWR	1.5:1
RF Connector	Type N (f)
Power Rating	10 W
Dimensions	16.2 x 14.7 x 1.4 in (411 x 373 x 36 mm)
Weight	1.36 kg
Operational Temperature	-30°C to +70°C
Mount Style	Surface / Mast
Pole Size	1 to 2.5 in (25 to 64 mm)
RoHS	Compliant

## HORIZONTAL PLANE

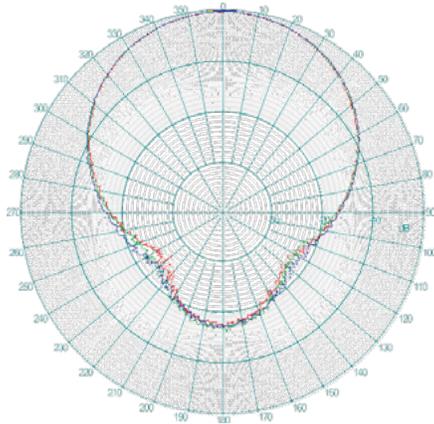


902 MHz

915 MHz

928 MHz

## ELEVATION PLANE

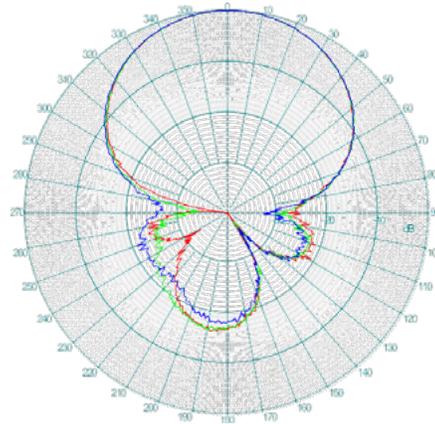

### TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

### te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

06/25 Original