

TeraSPEED® Plenum Distribution Cable, interlocking aluminum armored with plenum jacket, 36 fiber multi-unit with 12 fiber subunits

Product Classification

Regional Availability

Asia | Australia/New Zealand | Latin America | Middle East/Africa | North America

Portfolio

CommScope®

Product Type

Fiber indoor cable

General Specifications

Armor Type

Interlocking aluminum

Cable Type

Distribution

Construction Type

Armored

Fiber Type, quantity

36

Fibers per Subunit, quantity

12

Jacket Color

Yellow

Subunit Type

Gel-free

Subunit, quantity

3

Total Fiber Count

36

Dimensions

Buffer Tube/Subunit Diameter

5.77 mm | 0.227 in


Diameter Over Armor

19.69 mm | 0.775 in

Diameter Over Jacket

21.7 mm | 0.854 in

Representative Image

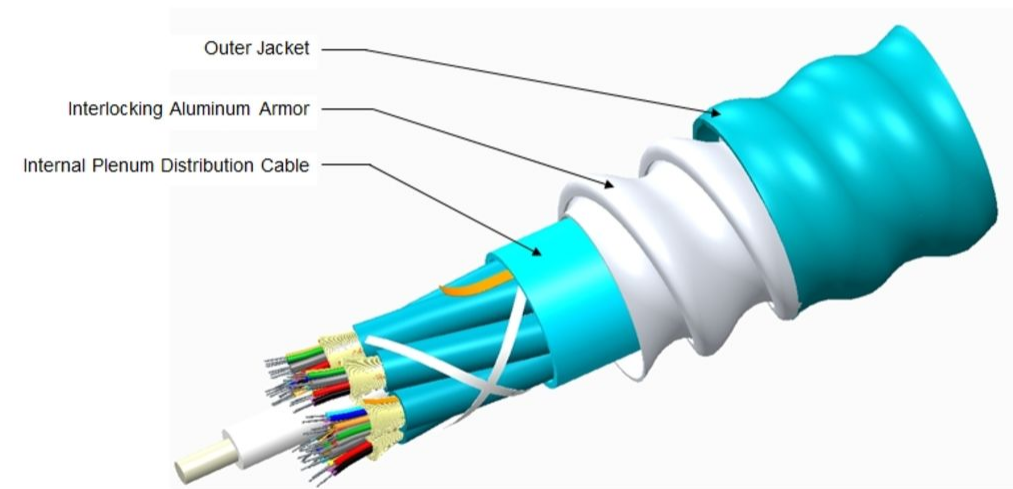

Mechanical Specifications

Minimum Bend Radius, loaded	434 mm 17.087 in
Minimum Bend Radius, unloaded	304 mm 11.969 in
Tensile Load, long term, maximum	400 N 89.924 lbf
Tensile Load, short term, maximum	1335 N 300.12 lbf
Compression	85 N/mm 485.363 lb/in
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	35 N-m 309.776 in lb
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads

Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7
Vertical Rise, maximum	97 m 318.241 ft

Optical Specifications

Fiber Type	G.652.D and G.657.A1 , TeraSPEED® G.652.D and G.657.A1, TeraSPEED®
-------------------	--

Environmental Specifications

Installation temperature	0 °C to +70 °C (+32 °F to +158 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/CEA S-83-596 Telcordia GR-409
Environmental Space	Plenum
Flame Test Listing	NEC OFCP (ETL) and c(ETL)
Flame Test Method	NFPA 130 NFPA 262

Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-20 °C to +70 °C (-4 °F to +158 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Packaging and Weights

Cable weight	420 kg/km 282.227 lb/kft
---------------------	----------------------------

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



Included Products

CS-8W-TB — TeraSPEED® Singlemode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable